

# SEA CZ, a.s.

Servisní energetická agentura

Finální


dodávky

kotelen



KL 2

## ECONOMISERS type SEK

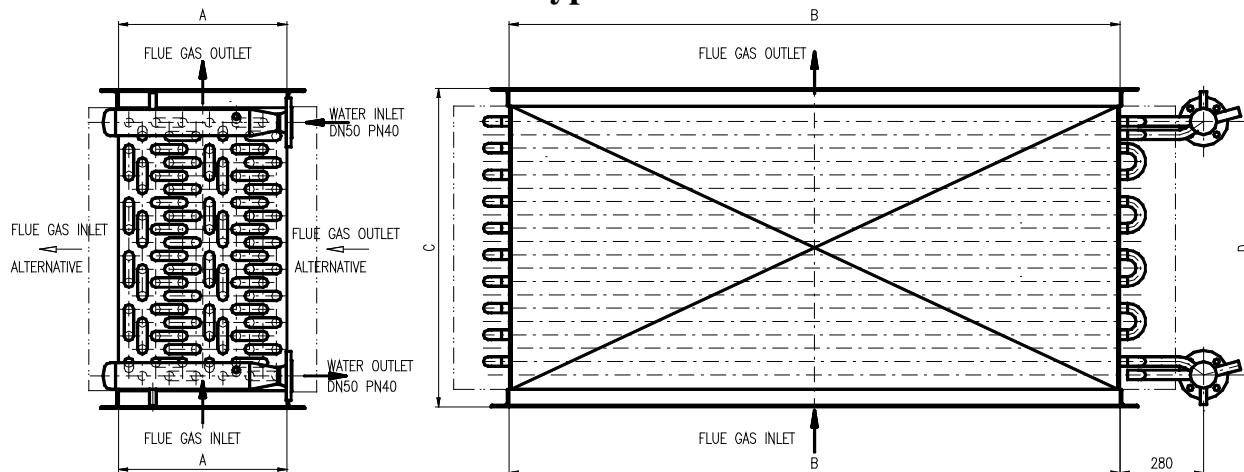

Economiser type	Heating surface (m <sup>2</sup> )	Capacity (L)	A (mm)	B (mm)	C (mm)	D (mm)
50	56	65	565	1350	720	495
60	64	85	565	1350	900	675
70	78	102	565	1350	1075	855
80	85	120	565	1450	1075	855
100	106	130	565	1550	1075	855
120	122	144	565	2050	1075	855
150	159	180	835	1550	1075	855
180	180	200	835	1750	1075	855

SEA CZ, a.s. zapsána v OR u Krajského obchodního soudu v Brně, oddíl B, vložka 3214

Výpusta 400, 760 01 Zlín

tel. 577 220 351-4

fax 577 220 357

e-mail: seacz-zl@seacz.cz

KB Zlín, č.ú. 27-1922340217/0100

IČO 25588664

Tyršova 469, 280 00 Kolín 2

tel. 321 729 249

fax 321 722 809

e-mail: seacz-kol@seacz.cz

KB Kolín, č.ú. 27-4397410267/0100

www.seacz.cz

DIČ 303-25588664

Economisers are mainly used for a preheating of feeding water for steam boilers, preheating of inlet water for hot water boilers or heating of technological or another kind of water. Economiser is attached to the outlet of flue gases from the boiler, to the horizontal or vertical flow of flue gases.

We attach economisers to specific boilers based on specific requirements for the utilisation of economiser. Dimensions and heating surface of economisers can be determined according to specific requirements for water heating or additional cooling of flue gases.

Economisers are designed as water-tube ones for calculated overpressure up to 6,5 MPa. Insulation and external encasing are carried out within the assembly.

Dimensions listed in the table are informative and are decided upon according to specific requirements.