


KL 34

## SAFETY LOOP type SPS

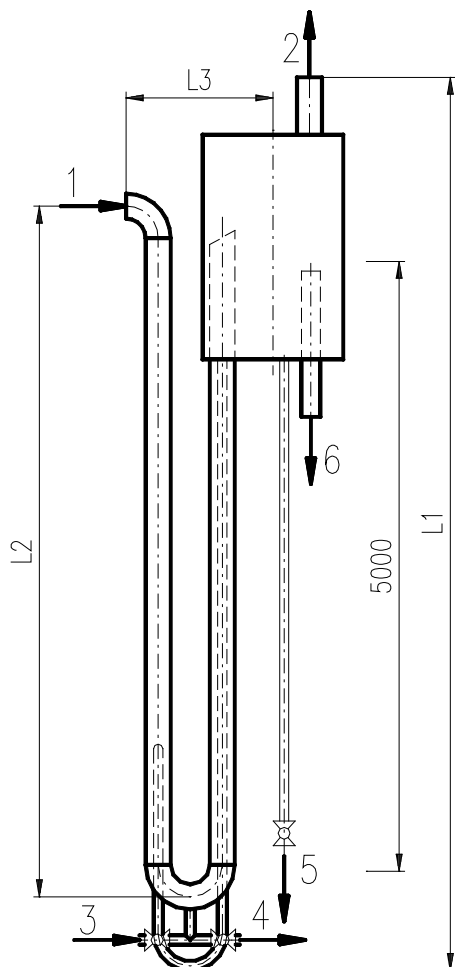

Model range	L1 (mm)	L2 (mm)	L3 (mm)	DN 1	DN 2	DN 3,4	DN 5	DN 6
100	5900	5110	610	100	65	1/2"	1/2"	65
150	5950	5160	845	150	100	1/2"	1/2"	100

- 1 Input
- 2 Outlet - deaeration
- 3 Filling
- 4 Discharge
- 5 Discharge control
- 6 Overflow

Material of loops: material class 11 (another material upon customer's request)  
Safety loop ensures an overpressure in feeding, condensate and other tanks where it is necessary to keep overpressure of 50 kPa. The loop ensures a maximal level in tanks. The safety loop can be also delivered in other dimensions upon customer's request.

Schema is just for information.

SEA CZ, a.s. zapsána v OR u Krajského obchodního soudu v Brně, oddíl B, vložka 3214  
Výpusta 400, 760 01 Zlín  
tel. 577 220 351-4  
fax 577 220 357  
e-mail: seacz-zl@seacz.cz  
KB Zlín, č.ú. 27-1922340217/0100

IČO 25588664

www.seacz.cz

DIČ 303-25588664

Tyršova 469, 280 00 Kolín 2  
tel. 321 729 249  
fax 321 722 809  
e-mail: seacz-kol@seacz.cz  
KB Kolín, č.ú. 27-4397410267/0100