


KL 5

STEAM CONDENSER type SKN

pressure series PN6, PN16, PN40, PN64, PN100

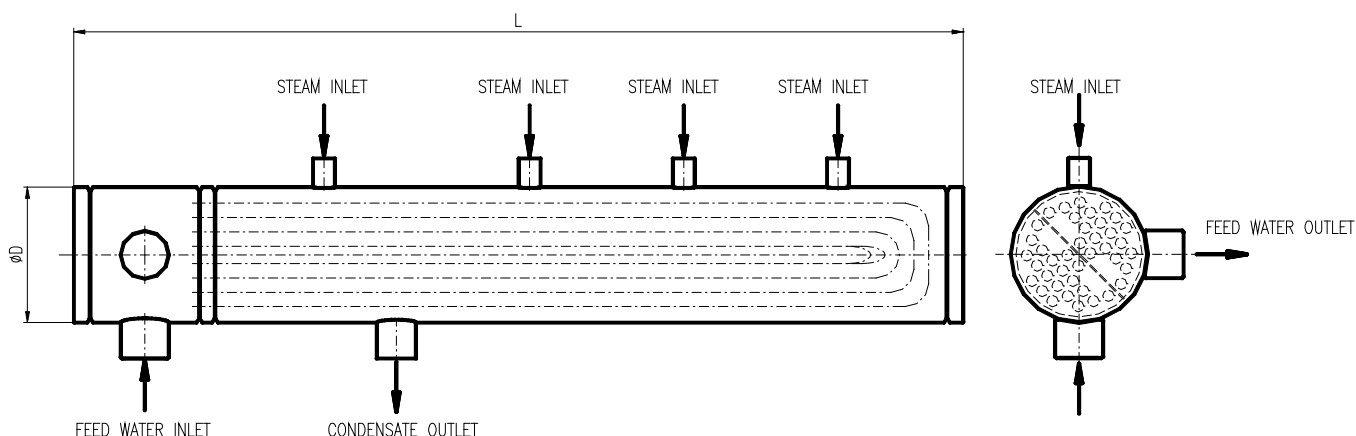

Condensers are used for a condensation of saturated steam. Condensed steam is injected into overheated steam – thus it ensures a control of overheated steam temperature.

Condensers can be delivered together with valves and fittings, base unit and insulation.

Materials: material of classes 11, 12, 15, 17

To order the condenser it is necessary to specify dimensions, distances of connections and their inside diameter, or a required capacity of the condenser. If required, we can propose both the capacity and dimensions of the condenser.

Dimensions listed in the table are informative and are decided upon according to specific requirements.

SEA CZ, a.s. zapsána v OR u Krajského obchodního soudu v Brně, oddíl B, vložka 3214

Výpusta 400, 760 01 Zlín

tel. 577 220 351-4

fax 577 220 357

e-mail: seacz-zl@seacz.cz

KB Zlín, č.ú. 27-1922340217/0100

IČO 25588664

Tyršova 469, 280 00 Kolín 2

tel. 321 729 249

fax 321 722 809

e-mail: seacz-kol@seacz.cz

KB Kolín, č.ú. 27-4397410267/0100

www.seacz.cz

DIČ 303-25588664